

Light Tunnel Generator

Overview:

Save costs by improving the efficiency and effectiveness of high power laser cutting. Use the PowerPhotonic Light Tunnel Generator to create a ring shaped spot that is maintained over such a long distance that it creates a light tunnel.

Light Tunnel Generators from PowerPhotonic are thin glass windows with a unique (patent applied for) precision freeform surface that are designed to be mounted inside a cutting or welding head.

They are a perfect solution to the problem of creating a ring shaped

intensity profile that persists over 10's of mm - far into metal that is being laser cut (or welded).

We have standard products for collimated high power fiber lasers operating at 1070nm up to 20kW CW power.

Our design and manufacturing process makes it easy for variations of standard products to be created. We can quickly modify designs to work for different beam diameters up to 50mm and/or to work in diverging (or converging) beams.

The PowerPhotonic effect:

>95%

Shaping Efficiency

>20kW

CW high power handling


3X DOF

Comparing Rayleigh Range of axicon

How it works:

The PowerPhotonic Light Tunnel Generator (LTG) is designed to work in a collimated beam, within an existing laser cutting (or welding) head.

The input beam is assumed to be super-Gaussian in profile and to be matched to the design input diameter. The beam shaper then redistributes energy within the beam, such that when the beam is focussed with a lens, it creates a ring, that extends many times longer along the optical axis than other ring generators (such as an axicon).

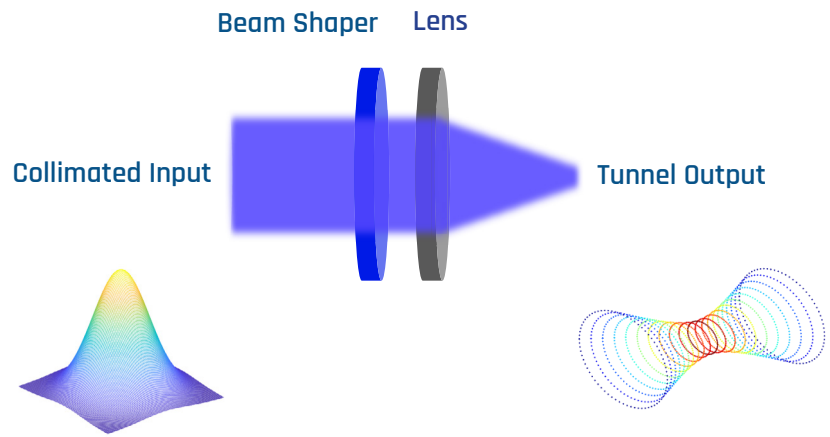

Key Features

- Efficient beam conversion
- High power handling
- Cost effective
- Customizable for diverging beam
- Customizable for beam size

Target Applications

- Laser Cutting
- Laser Welding
- Laser Drilling




PowerPhotonic

Standard Part Specification

Part Number	Function	Wavelength (nm)	Clear Aperture Diameter (mm)	Through Focus Range (mm)	Output Ring Diameter (μm)	Output Ring Thickness (μm)
PP-LTG-1064-500-AR	Ring Generator	1064	25	± 7.5	500	200
PP-LTG-1064-600-AR	Ring Generator	1064	25	± 7.5	600	200
PP-LTG-1064-1000-AR	Ring Generator	1064	25	± 7.5	1000	200


Standard Set Up

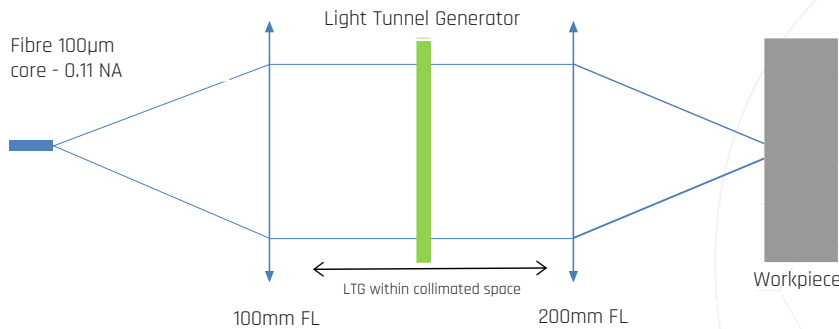

General Specifications

Parameter	Value
Glass diameter	30 mm ± 0.1
Glass thickness	3 mm ± 0.05
Transmission	> 99.5 %

Comparative Through Focus Performance

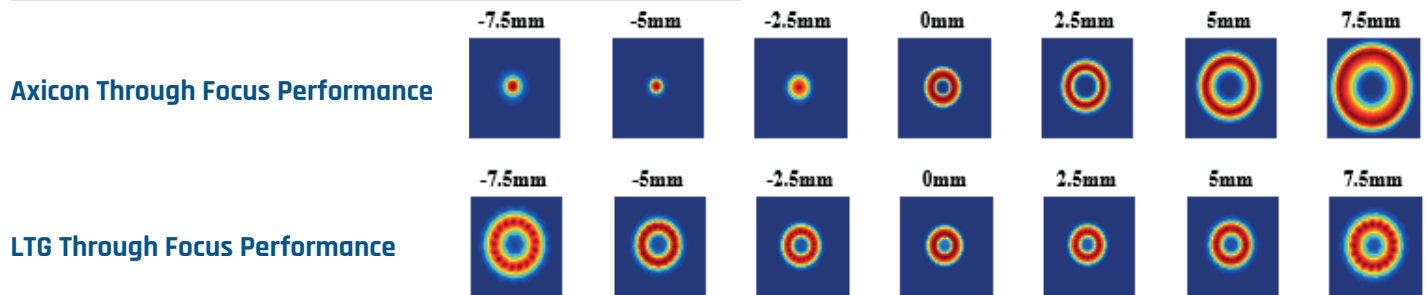

Custom Options

PP-LTG-1064-600-AR

Standard product designs can be readily modified for specific applications. Custom options include: different input beam diameter, different wavelength (in the window between 350nm and 2 μm) and different optic diameter & thickness. Designs to work in diverging or converging beams are available.

Sales and Technical Support

Japan

+81 80 1398 0331
yoshiyuki.mori@powerphotonic.com

North America

+1 571 866 0551
sales@powerphotonic.com

United Kingdom

PowerPhotonic Ltd
5A St. David's Drive,
Dalgety Bay, Fife, KY11 9PF

+44 1383 825 910
sales@powerphotonic.com

www.powerphotonic.com



PowerPhotonic