

Multimode Beam Shaper

Overview:

Improve the performance of multi-mode laser applications - use PowerPhotonic components to modify the multi-mode laser beam, creating a better match to the needs of the application.

Multimode beam shapers from PowerPhotonic are thin glass windows that are an excellent solution to the following problems:

- Generating an accurate Flat Top output from a Gaussian input
- Removing structure from a beam or light source
- Homogenizing a beam that has "hot spots"

If you want to customise the size or shape of the output spot, contact PowerPhotonic sales and technical team to discuss.

The PowerPhotonic effect:

>95%

Shaping Efficiency

>20kW


CW Power Handling

>100J

Pulsed Energy Handling

How it works:

Unique to PowerPhotonic, we create a diffuser surface from a multitude of randomised angled facets; so called Pseudo Random Intensity Mapping Elements (PRIME). The effect of the PRIME surface is to add a Flat Top statistical distribution of divergence angles to the input beam. The full width angle of this distribution is the nominal design divergence of the PRIME. Users may then use a lens (not supplied by PowerPhotonic) to focus the beam to a flat top spot.

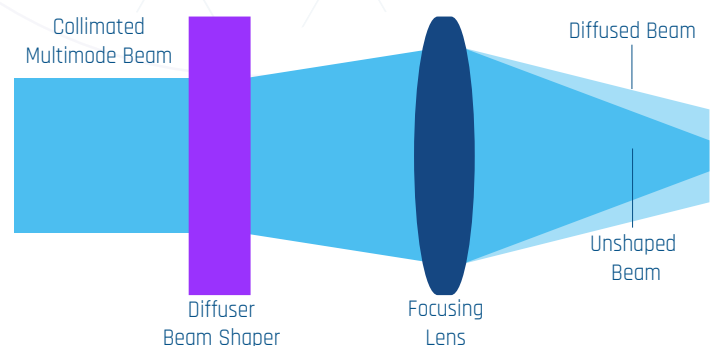

Key Features:


- No Diffractive Effects
- Insensitive to Input Parameters
- Uniform Flat Top Profile
- High LIDT Performance

Target Applications:


- Laser Tattoo Removal
- Laser Skin Rejuvenation
- Laser Projection
- Source Homogenization

Standard Product: Flat Top Diffuser

Part Number	Flat Top Shape	Clear Aperture Diameter (mm)	Output Divergence, Half Angle (deg)
PP-MM-SQFT-1.5-AR	Square	15	1.5
PP-MM-SQFT-3-AR	Square	15	3
PP-MM-CFT-1.5-AR	Circle	15	1.5
PP-MM-CFT-3-AR	Circle	15	3

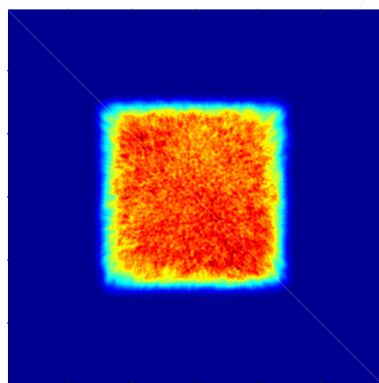

PP-MM-SQFT-3-AR

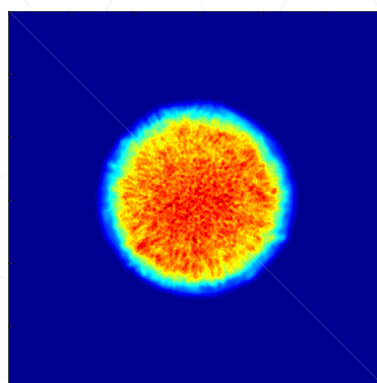

PP-MM-CFT-3-AR

General Specification:

Parameter	Value
Part Diameter (mm)	25.4+0/-0.1
Part Thickness (mm)	1.01±0.1
Coating Wavelength Band (nm)	532-1064
Coating Reflectance (%)	<0.5 @532,755, 1064

Functional Performance:

Parameter	Value
Power in the Bucket (%)	>95
Flatness Factor, F_f	>0.7
Plateau Uniformity, U_p	<0.2

Custom Options:

Standard product designs can be readily modified for specific applications. Custom options include: different input beam diameter, different wavelength (in the window between 350nm and 2μm), smaller flat top spot, different spot shape and profile, different part diameter & thickness.

Sales and Technical

Japan

yoshiyuki.mori@powerphotonic.com
+81 80 1398 0331

www.powerphotonic.com
sales@powerphotonic.com



PowerPhotonic
Enhancing Beam Performance

North America

PowerPhotonic Inc.
16220
S. La Cañada Drive
Sahaurita
AZ 85629
United States

United Kingdom

PowerPhotonic Ltd.
5A St. David's Drive,
Dalgety Bay
Fife
KY11 9PF
+44 1383 825 910

Multimode Beam Shaper Datasheet V1 Jan 2023

All specifications are correct at the time of production. We reserve the right to change our specifications without notice. © PowerPhotonic Ltd.